

SAS Tee Grid Description

SAS Exposed Tee Grid is a range of 38mm deep main runners and cross tees which are roll formed using galvanised steel and a wet painted capping.

Available in widths of 15mm (T15) and 24mm (T24), with main runners lengths in 3000mm (3m) and 3600mm (3.6m). Butt cut or joggled end detailing is available on all cross tees.

Tee Grid Features

- Easy to install
- Strong Modular Appearance
- Double Stitched for strength and rigidity
- Flexible Punching centres for ceiling modules
- Butt Cut or Joggled end options in accordance with specification
- Compatible with all T15 and T24 lay in ceiling tiles
- Cross Tee depth of 38mm ensures strength and rigidity

Finish/Colour

Supplied as standard in 'International White'. Other colours are available upon request.

Loading

A lightweight system can support additional loads such as services up to a limit of 3kg. This limit is based on a point or uniformly distributed load over 0.36m², positioned a minimum of 1000mm apart.

For further advice please contact the SAS technical department.

Suspension

2mm diameter galvanised suspension wire, SAS item number 29739, is available on request.

Wall Support

Tiles can be supported at perimeters using a 32 x 19mm 'International White' wall angle, SAS item number 29011.

Fire Rating

Fire Certification is available upon request.

Guarantee and Installation

SAS International guarantee all ceiling tile products used with SAS Tee Grid providing the ceiling has been installed in accordance with:


BS EN 13964:2004 Suspended Ceilings, Requirements and test methods.

AIS (Association of Interior Specialists) Guide No1. Good Practise For The Installation Of Suspended Ceilings.







For further guidance please contact SAS International.

Stock and Delivery


All SAS 'International White' Tee Grid products are available ex-stock for next day nationwide UK delivery, excluding Highlands and Northern Ireland.

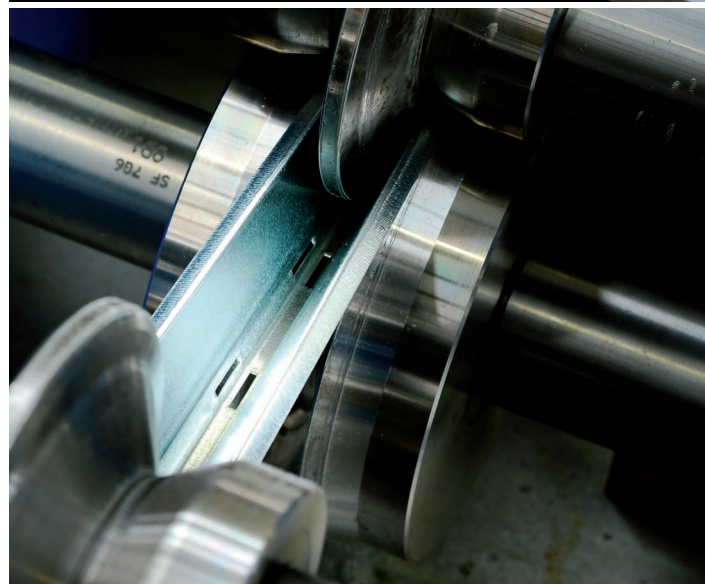


tee grid components

| | Item Number | Item Description | Length | Butt Cut/ Joggled | Qty in Box | Punching Detail |
|---|-------------|------------------|--------|----------------------|------------|-----------------|
| T15 Tee Grid Components | | | | | | |
|  | 30206 | T15 Main Runner | 3000mm | Butt Cut | 20 | Multi Punch |
| | 30207 | T15 Main Runner | 3600mm | Butt Cut | 20 | 100mm |
|  | 30208 | T15 Cross Tee | 500mm | Butt Cut | 60 | N/A |
| | 30209 | T15 Cross Tee | 600mm | Butt Cut | 60 | N/A |
| | 30210 | T15 Cross Tee | 750mm | Butt Cut | 60 | N/A |
| | 30211 | T15 Cross Tee | 1000mm | Butt Cut | 60 | Centre |
| | 30212 | T15 Cross Tee | 1200mm | Butt Cut | 60 | Centre |
|  | 30213 | T15 Cross Tee | 500mm | Joggled | 60 | N/A |
| | 30214 | T15 Cross Tee | 600mm | Joggled | 60 | N/A |
| | 30216 | T15 Cross Tee | 750mm | Joggled | 60 | N/A |
| | 30217 | T15 Cross Tee | 1000mm | Joggled | 60 | Centre |
| | 30218 | T15 Cross Tee | 1200mm | Joggled | 60 | Centre |
| T24 Tee Grid Components | | | | | | |
|  | 30220 | T24 Main Runner | 3000mm | Butt Cut | 20 | Multi Punch |
| | 30221 | T24 Main Runner | 3600mm | Butt Cut | 20 | 100mm |
|  | 30222 | T24 Cross Tee | 500mm | Butt Cut | 60 | N/A |
| | 30223 | T24 Cross Tee | 600mm | Butt Cut | 60 | N/A |
| | 30224 | T24 Cross Tee | 750mm | Butt Cut | 60 | N/A |
| | 30225 | T24 Cross Tee | 1000mm | Butt Cut | 60 | Centre |
| | 30226 | T24 Cross Tee | 1200mm | Butt Cut | 60 | Centre |
|  | 30227 | T24 Cross Tee | 500mm | Joggled | 60 | N/A |
| | 30228 | T24 Cross Tee | 600mm | Joggled | 60 | N/A |
| | 30229 | T24 Cross Tee | 750mm | Joggled | 60 | N/A |
| | 30230 | T24 Cross Tee | 1000mm | Joggled | 60 | Centre |
| | 30231 | T24 Cross Tee | 1200mm | Joggled | 60 | Centre |


T15




T24

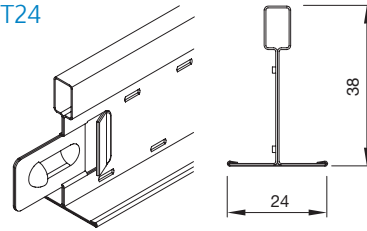


3000mm Main Runner

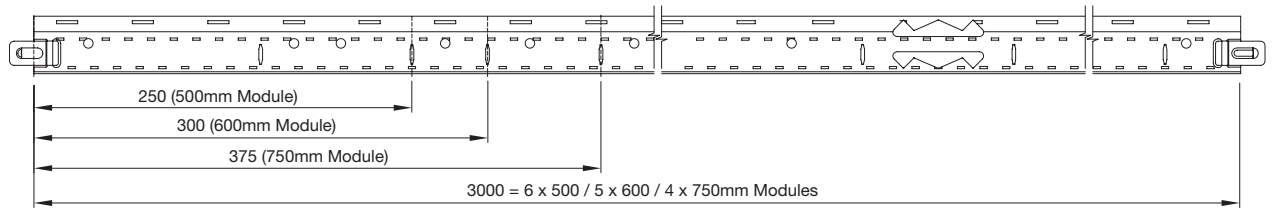


3600mm Main Runner

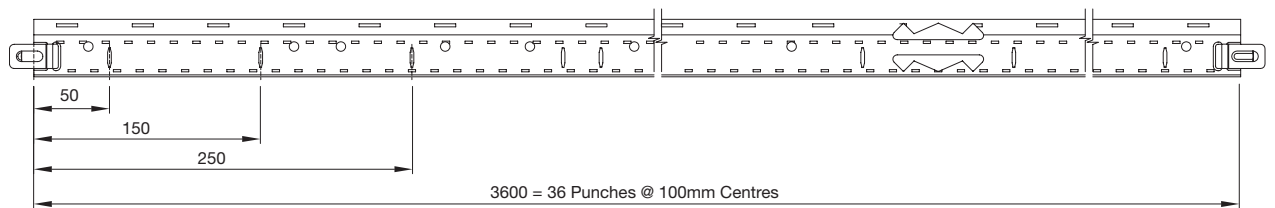

500/600/750mm Cross Tees

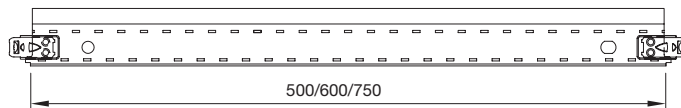


1000/1200mm Double Module Cross Tees

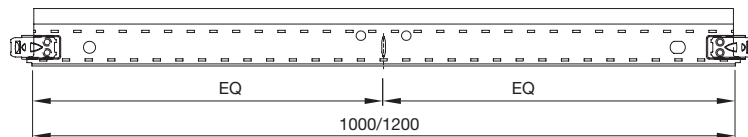

Grid Configuration Guide


500x500mm Module

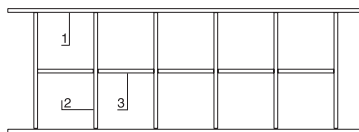

1] Main Runner

2] Double Module Cross Tee

600x600mm Module



3] Single Module Cross Tee

750x750mm Module

